

PP7/B. Stewart

FILE -  
Mission  
Rules



NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

**FINAL  
SYSTEMS MISSION RULES  
FOR  
APOLLO LUNAR SURFACE  
EXPERIMENTS PACKAGE**

**ALSEP 3**

**MARCH 23, 1970**

1. INTRODUCTION  
AND PURPOSE

2. GENERAL RULES  
AND SOP'S

3. ALSEP  
OPERATIONAL  
GUIDELINES

4. SPECIFIC RULES

APPENDICES

A ACRONYMS AND  
SYMBOLS

B DISTRIBUTION  
LIST

C CHANGE  
CONTROL

**PREPARED BY**

**FLIGHT CONTROL DIVISION**

**MANNED SPACECRAFT CENTER  
HOUSTON, TEXAS**

**FOR NASA INTERNAL USE ONLY  
INCLUDING APPROPRIATE CONTRACTORS**

INDEXING DATA

DATE 03-23-70 OPR MSC

# \_\_\_\_\_

T \_\_\_\_\_

PGM LSE

SUBJECT (Title)

SIGNATOR \_\_\_\_\_

LOC \_\_\_\_\_

MSC

070-35

03-23-70

MSC


R

LSE

(Title)

MSC

070-35

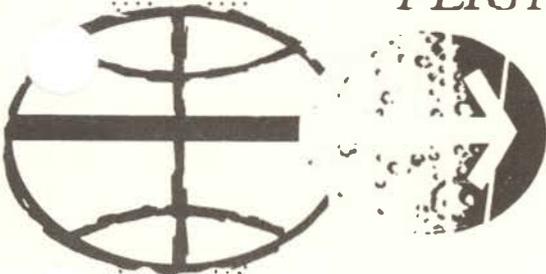

NASA - Manned Spacecraft Center

MISSION RULES

REV	ITEM
-----	------

ALSEP 3

FINAL SYSTEMS MISSION RULES FOR ALSEP 3

PREFACE


THIS DOCUMENT CONTAINS THE SYSTEMS MISSION RULES FOR ALSEP 3 AS OF MARCH 23, 1970. THIS AND ALL SUBSEQUENT REVISIONS TO THIS DOCUMENT WILL BE PRINTED ON DIFFERENT COLORED PAGES FOR EASY RECOGNITION.

IT IS REQUESTED THAT ANY ORGANIZATION HAVING COMMENTS, QUESTIONS, OR SUGGESTIONS CONCERNING THESE MISSION RULES CONTACT MR. JOHN H. TEMPLE, FLIGHT CONTROL OPERATIONS BRANCH, BUILDING 49, ROOM 646, PHONE 483-3838.

ANY REQUESTS FOR ADDITIONAL COPIES OR CHANGES TO THE DISTRIBUTION LIST IN APPENDIX B OF THIS DOCUMENT MUST BE MADE IN WRITING TO MR. SIGURD A. SJOBERG, DIRECTOR OF FLIGHT OPERATIONS, MANNED SPACECRAFT CENTER, HOUSTON, TEXAS.


THIS IS A CONTROL DOCUMENT AND ANY CHANGES ARE SUBJECT TO THE CHANGE CONTROL PROCEDURES DELINEATED IN APPENDIX C. THIS DOCUMENT IS NOT TO BE REPRODUCED WITHOUT THE WRITTEN APPROVAL OF THE CHIEF, FLIGHT CONTROL DIVISION, MANNED SPACECRAFT CENTER, HOUSTON, TEXAS.

APPROVED BY---



SIGURD A. SJOBERG  
DIRECTOR OF FLIGHT OPERATIONS

CONCURRED BY---



JAMES A. MCDIVITT  
COLONEL  
MANAGER, APOLLO SPACECRAFT PROGRAM

MISSION	REV	DATE	SECTION	GROUP	PAGE
ALSEP 3	FNL	3/23/70	APPENDIX C -		

NASA - Manned Spacecraft Center

MISSION RULES

TABLE OF CONTENTS

REV	ITEM						
<p>-----                      TABLE OF CONTENTS                      -----</p>							
		SECTION			PAGE		
		1. INTRODUCTION AND PURPOSE			1-1		
		2. GENERAL RULES AND SOP'S			2-1		
		3. ALSEP OPERATIONAL GUIDELINES			3-1		
		4. SPECIFIC RULES			4-1		
		APPENDIX A - ACRONYMS AND SYMBOLS			A-1		
		APPENDIX B - DISTRIBUTION LIST			B-1		
		APPENDIX C - CHANGE CONTROL			C-1		
		MISSION	REV	DATE	SECTION	GROUP	PAGE
		ALSEP 3	FNL	3/23/70	TABLE OF CONTENTS		1-1

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 1 - INTRODUCTION AND PURPOSE

REV	ITEM	<p>-----                      ' INTRODUCTION &amp; PURPOSE '                      -----</p> <p>MISSION RULES ARE PROCEDURAL STATEMENTS WHICH PROVIDE FLIGHT CONTROL PERSONNEL WITH GUIDELINES TO EXPEDITE THE DECISION-MAKING PROCESS. THE RULES ARE BASED ON AN ANALYSIS OF MISSION EQUIPMENT CONFIGURATION, SYSTEMS OPERATIONS AND CONSTRAINTS, AND MISSION OBJECTIVES. THE DIRECTOR OF FLIGHT OPERATIONS, MANNED SPACECRAFT CENTER, HOUSTON, TEXAS, HAS THE OVERALL RESPONSIBILITY FOR THE PREPARATION, CONTENTS, AND CONTROL OF THE SYSTEMS MISSION RULES FOR ALSEP.</p> <p>THE ALSEP MISSION RULES ARE PUBLISHED UNDER SEPARATE COVER FROM THE FLIGHT MISSION RULES BECAUSE OF THE DIFFERENCE IN LIFETIME OF THE ALSEP OPERATION AND SPECIFIC MISSION ORIENTATED ACTIVITIES. THE ALSEP MISSION RULES DOCUMENT WILL CONTAIN ALL ALSEP MISSION RULES INCLUDING---</p> <p>A. ALL MISSION RULES EFFECTING CREW INTERFACE WITH THE ALSEP AND</p> <p>B. ALL MISSION RULES EFFECTING MCC INTERFACE WITH THE ALSEP, THROUGH ALSEP SYSTEMS LIFETIME.</p> <p>THE FLIGHT MISSION RULES, IN ADDITION TO THIS DOCUMENT, WILL CONTAIN ALL ALSEP RULES INVOLVING FLIGHT CREW INTERFACE.</p> <p>THE FLIGHT MISSION RULES WILL TAKE PRECEDENCE SHOULD ANY CONFLICTS EXIST BETWEEN THIS DOCUMENT AND THE FLIGHT MISSION RULES BECAUSE OF REVISION CYCLES.</p> <p>MISSION RULES CAN BE CATEGORIZED AS GENERAL AND SPECIFIC. GENERAL MISSION RULES CONTAIN THE BASIC PHILOSOPHIES USED IN THE DEVELOPMENT OF THE ALSEP MISSION RULES. SPECIFIC MISSION RULES PROVIDE THE BASIC CRITERIA FROM WHICH REAL-TIME DECISIONS ARE MADE AND WILL BE FORMATTED AS FOLLOWS---</p> <p>A. THE CONDITION/MALFUNCTION COLUMN DEFINES THE FAILURE.</p> <p>B. THE PHASE COLUMN IDENTIFIES THE TIME INTERVAL IN WHICH THE CONDITION/MALFUNCTION OCCURS,</p> <p>C. THE RULING COLUMN DEFINES FLIGHT CONTROLLER ACTION AND/OR PROCEDURES THAT MUST BE ACCOMPLISHED AS A RESULT OF THE CONDITION.</p> <p>D. THE CUES/NOTES/COMMENTS COLUMN PROVIDES THE FLIGHT CONTROLLER WITH ADDITIONAL INFORMATION CONCERNING THE CONDITION/MALFUNCTION AND/OR RULING.</p>						
		MISSION	REV	DATE	SECTION	GROUP	PAGE	
		ALSEP 3	FNL	3/23/70	INTRODUCTION AND PURPOSE		1-1	

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 2 - GENERAL RULES AND SOP'S

REV	ITEM							
		<p>-----  ' GENERAL '  -----</p>						
2-1		THE ALSEP MISSION RULES OUTLINE PREPLANNED DECISIONS DESIGNED TO MINIMIZE THE AMOUNT OF REAL-TIME RATIONALIZATION REQUIRED WHEN NON-NOMINAL SITUATIONS OCCUR AFTER CREW ACTIVATION.						
2-2		WHEN A CONFLICT OF PLANNED ACTIVITIES OCCURS, THE ALSEP SENIOR ENGINEER WILL DETERMINE THE PRIORITY OF ACTIVITIES.						
2-3		IN SOME INSTANCES, THE SPECIFIC MISSION RULES MAY DEVIATE FROM THE GENERAL GUIDELINES OR FROM THESE GENERAL RULES. THE SPECIFIC MISSION RULE WILL APPLY IN ALL CASES, AND THE DEVIATIONS FROM THE GENERAL GUIDELINES WILL BE NOTED.						
2-4		THE ALSEP SENIOR ENGINEER MAY, AFTER ANALYSIS OF THE OPERATION, CHOOSE TO TAKE ANY NECESSARY ACTION REQUIRED FOR SUCCESSFUL COMPLETION OF ALSEP TEST OBJECTIVES.						
2-5		MISSION RULE LIMITS THAT ARE CONSIDERED TO BE INTERIM OR UNCONFIRMED NUMBERS WILL BE UNDERLINED IN THIS PUBLICATION AND ALL SUBSEQUENT REVISIONS UNTIL THE NUMBERS ARE CONFIRMED BY THE RESPONSIBLE NASA AGENCY.						
2-6		THE SYSTEMS LIMITS LISTED IN THESE RULES ARE THE ACTUAL VEHICLE LIMITS AS WELL AS THEY ARE KNOWN AND UNDERSTOOD AND ARE NOT BIASED TO COMPENSATE FOR TIME DELAYS OR INSTRUMENTATION ERRORS WITHIN THE ALSEP AND MSFN DATA/DISPLAY SYSTEMS.						
		MISSION	REV	DATE	SECTION	GROUP	PAGE	
		ALSEP 3	FNL	3/23/70	GENERAL RULES AND SOP'S	GENERAL	2-1	

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 3 - ALSEP OPERATIONAL GUIDELINES

REV	ITEM						
	3-1	<p style="text-align: center;">----- ' ALSEP OPERATIONAL GUIDELINE ' -----</p> <p>GENERAL</p> <p>A. THESE ALSEP GENERAL OPERATIONAL GUIDELINES ARE BASED ON OBJECTIVES IN THE FOLLOWING PRIORITIES---</p> <p>(1) PSEE (2) HFE (3) CPLEE (4) CCGE (5) ENGINEERING</p> <p>B. THE GATHERING OF SCIENTIFIC DATA WILL NOT BE COMPROMISED FOR ENGINEERING OR TEST PURPOSES.</p> <p>C. REDUNDANT OR BACKUP SYSTEMS WILL NOT BE SELECTED UNLESS A FAILURE WARRANTS SUCH ACTION. SWITCHING TO REDUNDANT SYSTEMS WILL NOT BE ACCOMPLISHED TO SATISFY ENGINEERING TESTS UNLESS ALL SCIENTIFIC MISSION OBJECTIVES HAVE BEEN COMPLETED.</p> <p>D. BIT RATES WILL NOT BE CHANGED ON THE ALSEP UNLESS THIS ACTION WILL CORRECT CERTAIN SYNC PROBLEMS (FROM THAT OPERATIONAL MSFN SITE) OR UNLESS A CHANGE OF BIT RATE IS NECESSARY TO SATISFY CERTAIN SCIENTIFIC OBJECTIVES. IF THE BIT RATE IS CHANGED FROM THE NORM BECAUSE OF A MSFN PROBLEM, THE ALSEP WILL BE CONFIGURED BACK TO NORMAL (1.06 KBPS) PRIOR TO TERMINATION OF SUPPORT FROM THAT SITE.</p> <p>E. BEFORE IMPLEMENTING ANY MISSION RULE ACTION BASED ON AN APPARENT ALSEP MALFUNCTION, IT WILL BE ASCERTAINED THAT THERE IS NO PROBLEM WITH THE MSFN SUPPORTING SITE.</p> <p>F. THE TIMER INHIBIT COMMAND WILL NOT BE SENT PRIOR TO ALL EXPERIMENTS BEING ON AND PROPERLY ADJUSTED FOR OPTIMUM SCIENTIFIC DATA RETURN.</p> <p>G. THE TIMER WILL NEVER BE INHIBITED WHILE THE ALSEP TRANSMITTER IS OFF, AND THE ALSEP TRANSMITTER WILL NEVER BE COMMANDED OFF WHILE THE TIMER IS INHIBITED. DURING NORMAL OPERATION THE TIMER WILL NOT BE INHIBITED AND THE TRANSMITTER WILL NOT BE COMMANDED OFF.</p> <p>H. ALSEP EXPERIMENTS WILL NOT BE COMMANDED TO 'STANDBY OFF' UNLESS THE ACTION IS JUSTIFIED BY AN ANOMALY.</p> <p>I. ANYTIME THERE IS AN AUTOMATIC SWITCHOVER TO PCU NO. 2 NOT IDENTIFIABLE TO A FAILURE IN PCU NO. 1, A ONE-TIME COMMAND WILL BE ATTEMPTED TO RETURN TO PCU NO. 1 IF THE +12 VDC BUS IS GREATER THAN 11.8 VDC.</p> <p>J. NO COMMAND FUNCTION CAN BE EXECUTED (OTHER THAN 'STANDBY OFF,' 'STANDBY SELECT,' OR 'OPERATE SELECT') IN AN EXPERIMENT, BY GROUND COMMAND OR BY ONBOARD TIMER, UNLESS THE EXPERIMENT IS IN THE 'OPERATE' MODE.</p> <p>K. THE ALSEP TURN-ON SEQUENCE IS---</p> <p>(1) ASTRONAUT ACTIVATES SHORTING PLUG SWITCH ASAP AFTER DEPLOYMENT OF THE PSE, CCGE, AND CPLEE.</p> <p>(2) CREW WILL ACTIVATE ASTRO SWITCH NO. 1 PER DIRECTION FROM THE GROUND. SWITCH NO. 1 ACTIVATION WILL BE BASED ON PREDICTED AVAILABILITY OF 38.2 WATTS FROM THE RTG (SEE FIGURE 3.2-2, ALSEP SODB).</p> <p>L. IF THE GROUND IS UNABLE TO COMMAND A TRANSMITTER ON AND/OR EXPERIMENTS ON, THE ASTRONAUT WILL TURN ON ASTRO SWITCHES NO. 2 AND/OR NO. 3 DURING EVA NO. 1 WHEN REQUESTED FROM THE GROUND.</p> <p>M. THE CENTRAL STATION HEATERS AND PDR'S WILL BE UTILIZED TO MAINTAIN AN AVERAGE INTERNAL THERMAL PLATE TEMPERATURE WITH THE LOWEST TEMPERATURE GREATER THAN 20 DEG F, AND THE HIGHEST TEMPERATURE LESS THAN 125 DEG F, UNLESS THERE IS AN ANOMALY REQUIRING THE C/S HEATERS TO BE OFF.</p> <p>N. IF ALSEP DEPLOYMENT TIME BECOMES CONSTRAINED AND THE CREW MUST RETURN TO THE LM, THE RTG SHORTING SWITCH AND ASTRONAUT SWITCH NO. 1 SHALL BE ACTUATED BY THE CREW IF THE ANTENNA IS LEVELED AND ALIGNED. IF THE ANTENNA IS NOT LEVEL AND ALIGNED, THESE SWITCHES SHALL NOT BE ACTUATED. (PICK UP HERE ON EVA NO. 2).</p>					
	MISSION	REV	DATE	SECTION	GROUP	PAGE	
	ALSEP 3	FNL	3/23/70	ALSEP OPS GUIDELINES	GENERAL	3-1	

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 3 - ALSEP OPERATIONAL GUIDELINES

REV	ITEM
-----	------

-----  
 ALSEP OPERATIONAL GUIDELINES (CONT)  
 -----

3-2

PSE

- A. THE PSE WILL BE UNCAGED ASAP AFTER THE PSE IS COMMANDED ON.
- B. THE PSE LEVELING MOTORS WILL NOT BE ACTIVATED PRIOR TO UNCAGING.
- C. AFTER PSE LEVELING OF THE HORIZONTAL COMPONENTS (LPX AND LPY) HAS BEEN COMPLETED, THE COARSE LEVEL SENSORS WILL BE GROUND COMMANDED OUT (VIA CMD 102).
- D. FOR PROPER OPERATION OF THE PSE, THE FEEDBACK FILTER MUST BE IN THE FOLLOWING MODES (CMD 101, PSE FILTER IN/OUT )---
  - (1) LEVELING MODE--FILTER OUT
  - (2) LONG PERIOD CALIBRATION--FILTER IN
  - (3) NORMAL OPERATIONAL MODE--FILTER IN
- E. THE X-AXIS AND Y-AXIS MASSES OF THE PSE SHOULD BE LEVEL BEFORE LEVELING THE Z-AXIS MASS.
- F. THE PSE WILL BE RELEVELLED AS INFREQUENTLY AS POSSIBLE.
- G. DURING FORCED LEVELING OPERATIONS, CAUTION SHALL BE EXERCISED PRIOR TO INITIATING LEVELING MOTOR OPERATION TO INSURE THAT PROPER DIRECTION AND SPEED HAVE BEEN SELECTED.

MISSION	REV	DATE	SECTION	GROUP	PAGE
ALSEP 3	FNL	3/23/70	ALSEP OPS GUIDELINES	PSE	3-2

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 3 - ALSEP OPERATIONAL GUIDELINES

REV	ITEM					
<p>-----                      ALSEP OPERATIONAL GUIDELINES (CONT)                      -----</p>						
3-4	HFE	<p>A. NO COMMANDS WILL BE UPLINKED TO THE HFE AT LESS THAN A 50-SECOND INTERVAL.</p> <p>B. A CONDUCTIVITY EXPERIMENT WILL NOT BE INITIATED UNLESS THERE WILL BE SUFFICIENT POWER TO COMPLETE THE EXPERIMENT WITHOUT INTERRUPTION. ONCE A PROBE HEATER IS TURNED ON FOR AN EXPERIMENT IT WILL NOT BE TURNED OFF UNLESS THE EXPERIMENT IS TERMINATED.</p> <p>C. THE DRILLING RATE FOR THE HFE IMPLACEMENT HOLES WILL BE USED TO DETERMINE THE GO/NO GO POINTS FOR THE TWO HOLES. THE GO/NO GO POINTS ARE AS FOLLOWS---</p> <p>FIRST AND SECOND HOLE - A MAXIMUM OF 10 MINUTES POWER ON TIME WILL BE EXPENDED ON EACH HOLE.</p> <p>(1) DEPTH LESS THAN 2 DRILL STRING SECTIONS--RETRACT DRILL AND START NEW HOLE IF RATE IS LESS THAN 1 SECTION PER 5 MINUTES, BASED ON THE RATE OBSERVED OVER 30 SECONDS. MOVE TO A NEW LOCATION ONLY TWICE PER HOLE.</p> <p>(2) DEPTH GREATER THAN 2 DRILL STRING SECTIONS--PROCEED WITH DRILLING UNTIL 6 DRILL STRING SECTIONS ARE IMPLACED OR UNTIL 10 MINUTES OF POWER ON TIME HAS ELAPSED (TO PREVENT THE POSSIBILITY OF EXCESSIVE DRILL STRING JOINT WEAR).</p>				
3-4	CPLEE	<p>GROUND COMMAND 113 (REMOVE DUST COVER) SHOULD NOT BE SENT TO THE ALSEP PRIOR TO LM LUNAR ASCENT.</p>				
3-5	CCGE	<p>A. THE CCGE WILL BE COMMANDED TO OPERATE-SELECT TO VERIFY THAT IT IS OPERABLE AS SOON AFTER DEPLOYMENT AS POSSIBLE.</p> <p>B. THE CCGE WILL NOT BE LEFT IN OPERATE-SELECT FOR LONGER THAN 5 MINUTES WITH THE DUST COVER INSTALLED.</p> <p>C. GROUND COMMAND 105/107 (REMOVE DUST COVER) WILL NOT BE SENT PRIOR TO OPERATING THE CCGE IN BOTH THE CAL ENABLE MODE AND THE RANGE MODE A (NORMAL MODE).</p>				
	MISSION	REV	DATE	SECTION	GROUP	PAGE
	ALSEP 3	FNL	3/23/70	ALSEP OPS GUIDELINES	HFE/CPLEE/CCGE	3-3

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 3 - ALSEP OPERATIONAL GUIDELINES

REV	ITEM							
	3-6	<p>EXPERIMENT PRIORITY</p> <p>A. AT DEPLOYMENT EXPERIMENT PRIORITIES ARE COMMENSURATE WITH THE MISSION PRIORITIES. THE PRIORITIES ARE AS FOLLOWS---</p> <ul style="list-style-type: none"> <li>(1) PSE</li> <li>(2) HFE</li> <li>(3) CPLEE</li> <li>(4) CCGE</li> <li>(5) OUST DETECTOR - M515</li> </ul> <p>B. DURING A NOMINAL ALSEP MISSION THE EXPERIMENTS WILL RETAIN THEIR PRIORITY AS LISTED ABOVE UNLESS THEY ARE CHANGED BY THE SCIENCE AND APPLICATIONS DIRECTORATE. HOWEVER, DURING CERTAIN PERIODS OF TIME DURING THE LUNAR CYCLE AN INDIVIDUAL EXPERIMENT OF LOWER PRIORITY MAY BE GIVEN AN ELEVATED LEVEL OF ATTENTION, THIS WILL BE BASED ON THE ABILITY OF THE EXPERIMENT TO RESPOND TO THE PHENOMENON OCCURRING.</p> <ul style="list-style-type: none"> <li>(1) THE CPLEE WILL HAVE THE FOCUS OF ATTENTION DURING THE FIRST CROSSING OF THE EARTH'S BOW SHOCK WAVE. FOR SUBSEQUENT CROSSINGS OF THE BOW SHOCK WAVE ANOTHER EXPERIMENT MAY REPLACE THE CPLEE DEPENDING ON THE DATA OBTAINED DURING THE PREVIOUS CROSSINGS.</li> <li>(2) DURING PREDICTED PERIODS OF ARRIVAL OF HIGH ENERGY PARTICLE RATES AT THE ALSEP SITE FROM SOLAR FLARES, THE CPLEE WILL HAVE THE FOCUS OF ATTENTION. DURING SUBSEQUENT FLARES ANOTHER EXPERIMENT MAY REPLACE THE CPLEE DEPENDING ON THE DATA OBTAINED FROM PREVIOUS FLARES.</li> <li>(3) THE FOCUS OF ATTENTION WILL BE ON THE FOLLOWING EXPERIMENTS DURING THE FIRST TERMINATOR CROSSINGS (SUNSET AND SUNRISE)--- <ul style="list-style-type: none"> <li>(A) PSE NO. 1 FROM 15 MINUTES BEFORE CROSSING UNTIL 1 HOUR AFTER CROSSING.</li> <li>(B) CPLEE NO. 2 FROM 6 HOURS PRIOR UNTIL 12 HOURS AFTER SUNSET.</li> <li>(C) CCGE NO. 2 FROM 2 HOURS PRIOR UNTIL 18 HOURS AFTER SUNRISE.</li> </ul> </li> </ul> <p>THE LISTED TIMES AND EXPERIMENTS MAY BE CHANGED FOR SUBSEQUENT TERMINATOR CROSSINGS AFTER THE FIRST.</p> <ul style="list-style-type: none"> <li>(4) THE HFE WILL RECEIVE THE FOCUS OF ATTENTION DURING THE TIMES WHEN MODE CHANGES ARE BEING COMMANDED AND DURING THE TIMES WHEN THE PROBE HEATERS ARE ON FOR A CONDUCTIVITY EXPERIMENT.</li> </ul>						
		MISSION	REV	DATE	SECTION	GROUP	PAGE	
		ALSEP 3	FNL	3/23/70	ALSEP OPS GUIDELINES	EXPERIMENT PRIORITY	3-4	

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 3 - ALSEP OPERATIONAL GUIDELINES

REV	ITEM							
	<p>3-7</p> <p>INSUFFICIENT POWER FOR SIMULTANEOUS SUPPORT OF ALL EXPERIMENTS</p> <p>IN GENERAL, AUTO THERMAL CONTROL OF THE CENTRAL STATION AND THE EXPERIMENTS WILL BE INHIBITED IF ADEQUATE POWER IS NOT AVAILABLE. THERMAL CONTROL WILL BE MANUALLY MANAGED TO PRECLUDE RIPPLE OFF OF EXPERIMENTS. CENTRAL STATION AVERAGE TEMPERATURES WILL BE ALLOWED TO GO AS LOW AS -20 DEG F. IF THE HEATER POWER IS REQUIRED FOR OPERATION OF AN EXPERIMENT, EXPERIMENT COMMANDS, REQUIRING CENTRAL STATION POWER STATION HEATER POWER, THAT WOULD CAUSE THE CENTRAL STATION AVERAGE TEMPERATURE TO GO BELOW 0 DEG F, WILL BE HELD TO A MINIMUM.</p>							
	<p>3-8</p> <p>EXPERIMENT INTERFERES WITH ANOTHER EXPERIMENT OR THE CENTRAL STATION</p> <p>IF ANY EXPERIMENT IS DETERMINED TO BE A STEADY SOURCE OF INTERFERENCE TO ANOTHER EXPERIMENT, OPERATION OF THE INTERFERING EXPERIMENT WILL BE CURTAILED (BUT NOT TERMINATED) FOR AS LONG AS THE INTERFERING EXPERIMENT IS STILL RETURNING DATA. IN NO CASE WILL ANY EXPERIMENT BE REMOVED FROM ITS DESIRED OPERATIONAL CONFIGURATION FOR MORE THAN 80 PERCENT OF ANY LUNAR DAY (29.5 EARTH DAYS).</p>							
		MISSION	REV	DATE	SECTION	GROUP	PAGE	
		ALSEP 3	FNL	3/23/70	ALSEP OPS GUIDELINES	EXPERIMENT PRIORITY	3-5	

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 4 - SPECIFIC RULES

REV	ITEM	CONDITION/MALFUNCTION	PHASE	RULING	CUES/NOTES/COMMENTS
	4-1	A. ST-01 FAILED CLOSED	:	A. DSS 3 HTR (10W)--OFF	A. DSS 3 HTR OFF--CMD 025 CUE-- UNEXPLAINED 10W DROP IN RESERVE POWER
		4-2 THROUGH 4-10 ARE RESERVED	:	:	:

	MISSION	REV	DATE	SECTION	GROUP	PAGE	
	ALSEP 3	FNL	3/23/70	SPECIFIC	THERMAL	4-1	

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 4 - SPECIFIC RULES

REV	ITEM	CONDITION/MALFUNCTION	PHASE	RULING	CUES/NOTES/COMMENTS																												
	4-11	FAILURE OF AUTO SWITCHOVER TO PCU 2		SELECT PCU 2	PCU 2 SEL---CMD 062 AUTO SWITCHOVER TO PCU 2 SHOULD OCCUR AT +12 VDC OUT OF LIMITS (LESS THAN 11 VDC/GREATER THAN 13 VDC) CUE--- THE FOLLOWING TM WILL BE OUT-OF-LIMITS--- <table border="1"> <thead> <tr> <th>TM</th> <th>NOMINAL</th> <th>HI</th> <th>LO</th> </tr> </thead> <tbody> <tr> <td>AE-9</td> <td>+12</td> <td>+13.0</td> <td>+11.0</td> </tr> <tr> <td>AE-7</td> <td>+29</td> <td>+31.3</td> <td>+25.7</td> </tr> <tr> <td>AE-8</td> <td>+15</td> <td>+16.2</td> <td>+13.8</td> </tr> <tr> <td>AE-10</td> <td>+5</td> <td>+5.4</td> <td>+4.6</td> </tr> <tr> <td>AE-11</td> <td>-12</td> <td>-11.0</td> <td>-13.0</td> </tr> <tr> <td>AE-12</td> <td>-6</td> <td>-5.5</td> <td>-6.5</td> </tr> </tbody> </table> VERIFY AE-01, AE-02 CAL VOLTAGES ARE WITHIN LIMITS.	TM	NOMINAL	HI	LO	AE-9	+12	+13.0	+11.0	AE-7	+29	+31.3	+25.7	AE-8	+15	+16.2	+13.8	AE-10	+5	+5.4	+4.6	AE-11	-12	-11.0	-13.0	AE-12	-6	-5.5	-6.5
TM	NOMINAL	HI	LO																														
AE-9	+12	+13.0	+11.0																														
AE-7	+29	+31.3	+25.7																														
AE-8	+15	+16.2	+13.8																														
AE-10	+5	+5.4	+4.6																														
AE-11	-12	-11.0	-13.0																														
AE-12	-6	-5.5	-6.5																														
	4-12	RESERVE POWER LESS THAN 2.0W		COMMAND EXPERIMENTS TO "STANDBY SELECT" BEGINNING WITH THE LAST PRIORITY EXPERIMENT (REFER TO GUIDELINE SECTION 6 EXPERIMENT PRIORITIES).	CUE--- C52 FOR PCU 1 C54 FOR PCU 2																												
	4-13 TO 4-20	RESERVED																															

	MISSION	REV	DATE	SECTION	GROUP	PAGE	
	ALSEP 3	FNL	3/23/70	SPECIFIC	ELECTRICAL	4-2	

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 4 - SPECIFIC RULES

REV	ITEM	CONDITION/MALFUNCTION	PHASE	RULING	CUES/NOTES/COMMENTS								
	4-21	ALSEP FAILS TO RESPOND TO A COMMAND		<p>A. REINITIATE THE COMMAND</p> <p>B. IF UNSUCCESSFUL, SELECT OTHER DECODER (ALSEP 3A OR 3B) AND REINITIATE THE COMMAND.</p>	<p>CUE---</p> <p>NO FUNCTIONAL VERIFICATION AND NO CMD VERIFICATION WORD (CVW)</p> <p>VERIFY RECEIVER CB (CB-01) HAS OPENED. AE-14 OR AE-13 OUT-OF-LIMITS. 12-HR PULSE WILL CLOSE CB.</p>								
	4-22	FAILURE OF 12 HOUR TIMER		<p>A.1. INITIAL 45 DAYS SUPPORT---</p> <p>IF ANY TWO OF THE FOLLOWING TEMPS IS BETWEEN -20 DEG F AND +155 DEG F, CONTINUE REAL TIME SUPPORT THRU 45 DAYS---</p> <p>AT31. CMD DEC BASE T AT32. CMD DEC INT T AT33. CMD DEC VCO T</p> <p>2. AFTER THE INITIAL 45 DAYS, THE TRANSMITTER WILL BE LEFT ON PROVIDING THE ALSEP IS---</p> <p>(A) RETURNING VALID SCIENTIFIC DATA</p> <p>(B) THERE IS NO INDICATION OF FAILURE OR EMINENT FAILURE IN THE COMMAND SYSTEM</p>	<p>THE TIMER WILL BE DEEMED FAILED AFTER NOT RECEIVING A SPECIFIED NUMBER OF CONSECUTIVE 12 HOUR PULSES AS A FUNCTION OF AT07, THERMAL PLATE 5 TEMP.</p> <table border="0"> <tr> <td></td> <td>NUMBER OF CONSECUTIVE MISSED 12 HR PULSES</td> </tr> <tr> <td>GREATER THAN -20 DEG F OR LESS THAN +155 DEG F</td> <td>10</td> </tr> <tr> <td>LESS THAN -20 DEG F</td> <td>2</td> </tr> <tr> <td>GREATER THAN +155 DEG F</td> <td>5</td> </tr> </table> <p>AT07</p> <p>THE FOLLOWING WILL BE GIVEN CONSIDERATION IN PREDICTING THE EMINENT FAILURE OF THE COMMAND SYSTEM---</p> <p>1. IS THE COMMAND SYSTEM TEMP. WITHIN 10 PERCENT OF ITS VALUE AT THE SAME SUN ANGLE DURING THE PREVIOUS LUNAR DAYS.</p> <p>2. IS THE ALSEP RESPONDING NORMALLY TO ALL COMMANDS.</p> <p>3. IS A CVW BEING RECEIVED AFTER A MINIMUM OF 99 PERCENT OF THE COMMANDS TRANSMITTED.</p>		NUMBER OF CONSECUTIVE MISSED 12 HR PULSES	GREATER THAN -20 DEG F OR LESS THAN +155 DEG F	10	LESS THAN -20 DEG F	2	GREATER THAN +155 DEG F	5
	NUMBER OF CONSECUTIVE MISSED 12 HR PULSES												
GREATER THAN -20 DEG F OR LESS THAN +155 DEG F	10												
LESS THAN -20 DEG F	2												
GREATER THAN +155 DEG F	5												
	4-23 TO 4-25	RESERVED											
		MISSION	REV	DATE	SECTION	GROUP	PAGE						
		ALSEP 3	FNL	3/23/70	SPECIFIC	COMMAND	4-3						

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 4 - SPECIFIC RULES

REV	ITEM	CONDITION/MALFUNCTION	PHASE	RULING	CUES/NOTES/COMMENTS
	4-26	WEAK TM SIGNAL		A. SELECT REDUNDANT XMTR	A. XMTR A SEL---CMD 012 XMTR B SEL---CMD 015
	4-27	LOSS OF SYNC OR BAD DECOMMED DATA		B. SELECT LOW BIT RATE	B. LOW BIT RATE SEL---CMD 007
	4-28	LOSS OF TM SIGNAL		A. SELECT REDUNDANT PROCESSOR	A. PROC 'X' SEL---CMD 034 PROC 'Y' SEL---CMD 035
	4-29	DATA DEMAND SIGNAL FROM DATA PROCESSOR FAILS HIGH		B. SELECT LOW BIT RATE	B. LOW BIT RATE SELECT---CMD 007
	4-30	LOSS OF ANY TM PARAMETER IN FIRST 15 CHANNELS OF 90 CHANNEL MULTIPLEXER		A. SEND TM ON.	A. TM ON---CMD 019
				B. SELECT REDUNDANT XMTR	B. XMTR A SEL---CMD 012 XMTR B SEL---CMD 015
				C. AFTER NEXT 12 HR PULSE--- REPEAT A&B.	C. IF RCVR CB (CB-01) OPEN, NEXT 12 HR PULSE WILL RESET IT. NOTE--- IF PSE LEVELING IS IN PROGRESS, SEND PSE STBY SEL--- CMD 043
				SELECT REDUNDANT PROCESSOR USING THE OTHER DECODER. DO NOT RETURN TO FAILED PROCESSOR.	CUE--- CVW IS STEADILY INDICATING AN ERRONEOUS PATTERN OTHER THAN ALL ZEROS (CVW LIGHT ON EVERY 0.6 SECONDS) AFTER A CMD HAS BEEN SENT, DISABLE CMD TO FAILED PROCESSOR. PROC 'X' SEL---CMD 034 PROC 'Y' SEL---CMD 035
				SELECT REDUNDANT PROCESSOR	DO NOT APPLY IF MISSION RULE 31-29 HAS BEEN INVOKED.

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 4 - SPECIFIC RULES

REV	ITEM	CONDITION/MALFUNCTION	PHASE	RULING	CUES/NOTES/COMMENTS			
	4-31	FAILURE OF AUTOMATIC LEVELING MODE		PERFORM FORCED LEVELING BY GROUND COMMANDS	PSE ACTIVATION PRESETS LEVELING MODE TO AUTOMATIC. CMD 103 WILL SWITCH TO FORCED MODE. CMD 103 IS A TWO-STATE CMD. PSE LEVELING MODE AUTO/FORCED.			
	4-32	PSE LEVELING MOTOR FAILS ON		ALTERNATELY GND CMD PSE TO STANDBY SELECT AND TO OPERATE SELECT	CUE--- LEVELING MOTOR WILL DRAW 3 WATTS FROM RESERVE POWER. PSE STBY SEL--CMD 043 PSE OPER. SEL--CMD 042			
	4-33	PSE LEVELING MOTOR FAILS OFF		NO ACTION TO BE TAKEN	CUE--- NO DROP IN RESERVE POWER (NORMALLY 3 WATTS) WHEN REPEATED EFFORTS ARE MADE TO TURN MOTOR ON, AND NO ACTIVITY ON SHORT PERIOD Z-DATA CHANNEL.			
	4-34	FAILURE OF MECHANICAL LEVEL DRIVE		SELECT LOW SPEED AND HIGH SPEED AND DIRECTION REVERSALS ALTERNATELY.	CUE--- NO MOTION OF THE PLATFORM CAN BE DETECTED ON THE LP HORIZONTAL OR LP-Z COMPONENT TIDAL OUTPUT. X-MTR ON/OFF--CMD 070 Y-MTR ON/OFF--CMD 071 Z-MTR ON/OFF--CMD 072 DIRECTION PLUS/MINUS--CMD 074 SPEED LOW/HIGH--CMD 075			
	4-35	MISALIGNED COARSE SENSOR		A. COMMAND COARSE SENSOR OUT WHEN CORRESPONDING MOTOR IS IN LEVELING OPERATION. B. PERFORM FORCED LEVELING OF THE PSE BY GND CMD.	WHILE IN FINAL LEVELING PHASE (LOW STEPPING RATE), THE MOTOR REVERTS TO A HIGH STEPPING RATE REPEATEDLY WITHOUT ACHIEVING CENTERING. COARSE LEVEL SENSOR AND GIMBAL WILL NEVER ALIGN, AND THE MOTOR WILL CONTINUE TO DRIVE BEYOND LEVEL. COARSE SENSOR OUT--CMD 102			
	4-36	FAILURE OF COARSE LEVEL SENSOR		A. SELECT FORCED PSE LEVELING MODE. B. GROUND COMMAND COARSE LEVEL SENSOR OUT. 1. PROCEED WITH INITIAL FORCED LEVELING FOR COARSE LEVELING. 2. USE AUTO MODE FOR FINE LEVELING.	CUE--- NO HIGH SPEED MOTOR OPERATION IS NOTICED DURING INITIAL LEVELING PHASE AND COMPONENT DOES NOT CENTER WITHIN EXPECTED TIME (35 MINUTES MAXIMUM IN AUTO MODE). USE HIGH SPEED LEVELING FOR COARSE LEVELING. CMD 103--PSE LEVELING MODE AUTO/FORCED. CMD 102--COARSE LEVEL SENSOR OUT			
		MISSION	REV	DATE	SECTION	GROUP	PAGE	
		ALSEP 3	FNL	3/23/70	SPECIFIC	PSE	4-5	

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 4 - SPECIFIC RULES

REV	ITEM	CONDITION/MALFUNCTION	PHASE	RULING	CUES/NOTES/COMMENTS		
	4-37	LONG PERIOD COMPONENT STICKS		<p>A. USE HIGH SPEED, FORCED LEVELING IN DIRECTION WHICH PULLS MASS AWAY FROM STOP.</p> <p>B. IF UNSUCCESSFUL, SELECT LOW SPEED AND HIGH SPEED AND DIRECTION REVERSALS ALTERNATELY.</p>	<p>CUE---</p> <p>FAILURE TO CENTER WITHIN EXPECTED TIME (35 MINUTES MAXIMUM IN AUTO MODE). IF STEPS A AND B FAIL, LP COMPONENT IS DEFECTIVE.</p> <p>NOTE---</p> <p>DO NOT EXCEED 5 MIN 30 SEC IN HIGH SPEED.</p> <p>X-MTR ON/OFF--CMD 070</p> <p>Y-MTR ON/OFF--CMD 071</p> <p>Z-MTR ON/OFF--CMD 072</p> <p>DIRECTION PLUS/MINUS--CMD 074</p> <p>SPEED HIGH/LOW--CMD 075</p>		
	4-38	ELECTRICAL FAILURE OF LONG PERIOD COMPONENT		TERMINATE LEVELING OF THE AFFECTED AXIS AFTER COARSE SENSOR PHASE IS COMPLETED	<p>CUE---</p> <p>TIDAL OUTPUT IS WITHIN RANGE, BUT IS NOT AFFECTED BY LEVELING OR CENTERING DRIVE.</p>		
	4-39	AUTOMATIC SWITCHOVER OF PSE TO STANDBY		CMD PSE TO OPERATE SELECT	<p>IF CIRCUIT BREAKER CB-07 HAS OPENED FROM OVERCURRENT (500 MA +/- 10 PERCENT), STANDBY MODE WILL BE SELECTED AND THE CB WILL BE RESET AUTOMATICALLY.</p> <p>PSE OPER SEL--CMD 042</p>		
	4-40	FAILURE OF PSE UNCAGE SEQUENCE		<p>A. TO UNCAGE ARM---</p> <p>1. SEND UNCAGE ARM/FIRE.</p> <p>2. IF UNSUCCESSFUL, FIRST 12 HR TIMER PULSE WILL ARM ACTUATOR.</p> <p>3. IF UNSUCCESSFUL, 96 HR +2 MIN PULSE FROM DELAYED CMD SEQUENCER WILL ARM ACTUATOR.</p> <p>B. TO UNCAGE FIRE (AFTER ACTUATOR HAS BEEN ARMED).</p> <p>1. SEND UNCAGE ARM/FIRE</p> <p>2. IF UNSUCCESSFUL, SEND CMD 043 PSE STANDBY SEL, THEN CMD 042 PSE OPERATE SEL.</p> <p>3. IF UNSECESSFUL, NEXT 12-HR TIMER PULSE WILL FIRE THE ACTUATOR.</p>	<p>NORMAL UNCAGING IS ACCOMPLISHED BY SENDING CMD 072-- UNCAGE ARM/FIRE--TWICE, ONCE TO ARM AND ONCE TO FIRE THE ACTUATOR.</p> <p>NOTE---</p> <p>UNCAGING MAY NOT BE POSSIBLE UNLESS AT05 THERMAL PLATE 3 TEMP IS ABOVE +25 DEG F.</p> <p>NOTE---</p> <p>SELECTING PSE STANDBY WILL RESET ARM LOGIC IF ACTUATOR IS NOT FIRED.</p> <p>NOTE---</p> <p>30 SEC IS REQUIRED BETWEEN ARM AND FIRE TO CHARGE CAPACITOR.</p>		
		MISSION	REV	DATE	SECTION	GROUP	PAGE
		ALSEP 3	FNL	3/23/70	SPECIFIC	PSE	4-6

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 4 - SPECIFIC RULES

REV	ITEM	CONDITION/MALFUNCTION	PHASE	RULING	CUES/NOTES/COMMENTS		
	4-41	PSE GOES OFF WHILE IN STANDBY MODE		DURING NORMAL OPERATIONS, CMD PSE TO STBY SEL	CUE--- EXP 2 STBY DISCRETE EXTINGUISHED, AND RESERVE POWER INCREASES SINCE POWER IS REMOVED FROM THE HEATERS. IF FUSE (F-04) HAS BEEN BLOWN BY OVERCURRENT (SOOMA), CAPABILITY TO SELECT PSE STBY MODE IS LOST.  CMD 043--PSE STBY SEL CMD 017--PDR 1 ON		
	4-42	PSE TEMP LOW AND AUTO THERMAL CONTROL FAILS		COMMAND HEATER TO FORCED ON	ASSUME AUTOMATIC THERMOSTAT CONTROL FAILED. CMD 076 IS A 4-STATE CMD, WHICH CAN SEQUENTIALLY STEP THRU THE FOLLOWING MODES TO CONTROL THE PSE SENSOR HEATER.  1. AUTO OFF 2. FORCED HTR ON 3. FORCED OFF 4. AUTO ON  DL-07 PSE INSTRUMENT TEMP LOW LIMIT IS 129 DEG F. MINIMUM OF 5 WATTS RESERVE POWER IS REQUIRED.		
	4-43	PSE TEMP HIGH AND AUTO THERMAL CONTROL FAILS		A. COMMAND HEATER TO FORCED OR AUTO OFF  B. IF UNSUCCESSFUL, CMD PSE TO STBY, THEN TO OPERATE	A. CMD 076 IS 4-STATE CMD.  1. AUTO OFF 2. FORCED HTR ON 3. FORCED OFF 4. AUTO ON  DL-07 PSE INSTRUMENT TEMP HIGH LIMIT IS +127 DEG. F.  B. SELECTING PSE TO STBY WILL REINITIALIZE TO AUTOMATIC THERMOSTAT CONTROL.		
	4-44	LOSS OF DOWNLINK DURING LEVELING MOTOR OPERATION		SEND PSE STBY SEL	NOTE--- PSE STBY SEL WILL STOP MOTORS.		
	4-45 TO 4-50	RESERVED					
		MISSION	REV	OATE	SECTION	GROUP	PAGE
		ALSEP 3	FNL	3/23/70	SPECIFIC	PSE	4-7

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 4 - SPECIFIC RULES

REV	ITEM	CONDITION/MALFUNCTION	PHASE	RULING	CUES/NOTES/COMMENTS		
	4-51	UNABLE TO DRILL NOMINAL HFE EMPLACEMENT HOLES					
		A. NEITHER HOLE DEEP ENOUGH TO EMPLACE HFE PROBES		A. LAY PROBES ON HORIZONTAL LUNAR SURFACE AND COVER PROBES AND FIRST 6 FEET OF CABLE WITH DUST AS MUCH AS POSSIBLE	A. HOLE IS NOT DEEP ENOUGH TO EMPLACE A HFE PROBE IF THE DRILL STRING SECTIONS WILL NOT STAND UNATTENDED.		
		B. HOLES NOT NOMINAL DEPTH		B. ADD 1 DRILL STRING TO SUPPORT PROBE IF NECESSARY. PLACE PROBES IN HOLES AS FAR AS THEY WILL GO			
	4-52	HAVE CHOICE OF DRILLING 2ND HFE HOLE OR CORE SAMPLE HOLE.		DRILL 2ND HFE PROBE EMPLACEMENT HOLE.	HFE HAS PRIORITY OVER CORE SAMPLE.		
		4-53 TO 4-60 RESERVED					
		MISSION	REV	DATE	SECTION	GROUP	PAGE
		ALSEP 3	FNL	3/23/70	SPECIFIC	HFE	4-8

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 4 - SPECIFIC RULES

REV	ITEM	CONDITION/MALFUNCTION	PHASE	RULING	CUES/NOTES/COMMENTS		
	4-61	CCGE DUST COVER COMES OFF DURING DEPLOYMENT.		DO NOT TRY TO REINSTALL.	DUST FROM ASTRONAUT GLOVES DOES MORE HARM THAN HAVING COVER OFF.		
	4-62	UNABLE TO BREAK CCGE SEAL.		WAIT FOR DELAYED TIMER TO INITIATE COMMANDS.	96 HR + 2 MIN SET SEAL BREAK 96 HR + 4 MIN EXECUTE SEAL BREAK CCGE MUST BE IN OPERATE SELECT AT THE TIME OF THE 96 HOUR PULSES.		
	4-63	UNEXPECTED CHANGE IN CCGE MODE OR RANGE		CMD TO STANDBY-  A. IF CCGE TEMP. IS DECREASING WAIT FOR A DELTA TEMP. OF 1 DEG AND RESET THE EXP.  B. IF CCGE TEMP. IS INCREASING WAIT UNTIL IT HAS DECREASED TO 1 DEG BELOW TEMP. AT WHICH ARCING OCCURRED, AND RESET THE EXPERIMENT.	USE DG-05 AS TEMP. REFERENCE.		
	4-64 TO 4-70	RESERVED					
		MISSION	REV	DATE	SECTION	GROUP	PAGE
		ALSEP 3	FNL	3/23/70	SPECIFIC	CCGE	4-9

NASA - Manned Spacecraft Center

MISSION RULES

SECTION 4 - SPECIFIC RULES

REV	ITEM	CONDITION/MALFUNCTION	PHASE	RULING	CUES/NOTES/COMMENTS														
	4-71	CPLÉE DUST COVER COMES OFF DURING DEPLOYMENT		DO NOT REINSTALL	CONTINUE DEPLOYMENT														
	4-72	UNABLE TO REMOVE CPLÉE DUST COVER		WAIT FOR DELAYED TIMER TO INITIATE CMD.	96 HR + 2 MIN--CPLÉE DUST COVER REMOVAL. CPLÉE MUST BE IN OPERATE SELECT AT THE TIME OF THE 96 HOUR PULSES.														
	4-73	UNABLE TO MAINTAIN THERMAL INTEGRITY IN CPLÉE		INT T LESS THAN - 10 DEG C CMD HTR ON IN FORCED MODE---CMD 111  IF IN FORCED MODE AND INT T GREATER THAN +10 DEG C CMD HTR OFF --- CMD 112	THERMOSTAT IS SET 0 DEG C +/- 10 DEG C.														
	4-74	THERMOSTAT FAILED  A. CLOSED -(HTR ON) TEMP GREATER THAN +10 DEG C  B. OPEN -(HTR OFF) TEMP LESS THAN -10 DEG C		A. REVERT TO FORCED HTR CONTROL AS IN MR 4-73  B. REVERT TO FORCED HTR CONTROL AS IN MR 4-73	USE AC-6 AS TEMP REFERENCE														
	4-75	UNEXPECTED CHANGE IN CPLÉE MODE OR SEQUENCE.		CMD TO STANDBY  A. IF CPLÉE TEMP. IS DECREASING WAIT FOR A DELTA TEMP. OF 1 DEG. AND RESET THE EXP.  B. IF CPLÉE TEMP. IS INCREASING WAIT UNTIL IT HAS DECREASED TO 1 DEG. BELOW THE TEMP. AT WHICH THE UNEXPLAINED CHANGES OCCURED AND RESET THE EXP.	USE AC-D5 AS TEMP. REFERENCE.														
	4-76	INT. TEMP GREATER THAN +66 DEG C WITH DUST COVER ON, IN OPER SEL.		CMD TO STBY SEL	CUE---  USE AC-86 AS TEMP. REFERENCE.														
	4-77 TO 4-80	RESERVED																	
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:25%;">MISSION</td> <td style="width:10%;">REV</td> <td style="width:10%;">DATE</td> <td style="width:20%;">SECTION</td> <td style="width:15%;">GROUP</td> <td style="width:10%;">PAGE</td> <td style="width:10%;"></td> </tr> <tr> <td>ALSEP 3</td> <td>FNL</td> <td>3/23/70</td> <td>SPECIFIC</td> <td>CPLÉE</td> <td>4-10</td> <td></td> </tr> </table>						MISSION	REV	DATE	SECTION	GROUP	PAGE		ALSEP 3	FNL	3/23/70	SPECIFIC	CPLÉE	4-10	
MISSION	REV	DATE	SECTION	GROUP	PAGE														
ALSEP 3	FNL	3/23/70	SPECIFIC	CPLÉE	4-10														







# NASA - Manned Spacecraft Center

## MISSION RULES

### APPENDIX B - DISTRIBUTION LIST

REV	ITEM		MISSION	REV	DATE	SECTION	GROUP	PAGE
	DEPUTY	DIRECTOR AB/KRAFT, JR. C.C.						
	DIRECTOR	OF FLIGHT OPERATIONS FA/SJOBORG, S.A.						
	FLIGHT	CONTROL DIVISION FC/KRANZ, E.F. FC/ROACH, J.W. FC2/HARLAN, C.S. (6) FC8/SAULTZ, J.E. (15) FC6/SHELLEY, C.B. (2) FC9/BRADFORD, R. (BDX) (4)						
	FLIGHT	SUPPORT DIVISION FS5/ROUNOTREE, J.R. FS2/SATTERFIELD, J.M.						
	MISSION	PLANNING AND ANALYSIS DIVISION FM/MAYER, J.P. FM/HUSS, C.R.						
	DIRECTOR	OF FLIGHT CREW OPERATIONS AC/SLAYTON, O.K. AB/ASTRONAUT OFFICE						
	FLIGHT	CREW SUPPORT DIVISION CF/NORTH, W.J. CF3/ALLEN, L.O. (2) CF5/RICHARD, L.G. CF6/O'NEILL, J.W. CFK/MCCAFFERY, R.D. (4)						
	APOLLO	SPACECRAFT PROGRAM OFFICE PA/COL, MCDIVITT PA/MORRIS, O. PA/JOHNSTON, R.S. PA/KUBICKI, R. PA2/ASPO FILES PD4/SEVIER, J. (2) PD7/KOHR, R.H. (2) PD9/CRAIG, J.W. PE (2) PG PP7/STEWART, B. PP12/TASH, H. (3) PT/ARABIAN, D. PT3/DATA LIBRARY (8)						
	DIRECTOR	OF ENGINEERING AND DEVELOPMENT EA2/GARDINER, R.A. EH/WISEMAN, D. (4)						
	FLIGHT	SAFETY OFFICE SA/FRENCH, J.C.						
	DIRECTOR	OF SCIENCE AND APPLICATIONS TM/LUNAR MISSIONS OFFICE (3) TM5/STEPHENSON, B. (15)						
	OFFICE	MANNED SPACEFLIGHT MAO/LAND, E.W. (20)						
	ATOMIC	ENERGY COMMISSION ZS5/REMINI, W.C. (2)						
			ALSEP 3	FNL	3/23/70	APPENDIX B - DISTR. LIST		B-1

NASA - Manned Spacecraft Center

MISSION RULES

APPENDIX C - CHANGE CONTROL

REV	ITEM							
<p>-----                      ! CHANGE CONTROL !                      -----</p>								
	1.0	INTRODUCTION						
	1.1	PURPOSE						
		THE PURPOSE OF THIS APPENDIX IS TO DELINEATE CHANGE CONTROL PROCEDURES FOR THE ALSEP MISSION RULES. THIS WILL INSURE THE PROPER COORDINATION OF CHANGES, PROVIDE A RECORD OF PROPOSED CHANGES (INCLUDING THE RATIONALE FOR MAKING THEM), AND WILL PROVIDE A MEANS FOR PROMULGATING INDIVIDUAL RULE UPDATES BETWEEN REVISIONS (INTERIM CHANGES).						
	1.2	EFFECTIVITY						
		MARCH 23, 1970.						
	2.0	CHANGE PROCEDURES						
	2.1	SUBMISSION OF CHANGES						
		PROPOSED CHANGES ARE SOLICITED FROM ANY INDIVIDUAL OR ORGANIZATION HAVING A VALID INPUT. ALL CHANGES WILL BE SUBMITTED DIRECTLY TO THE CHIEF, FLIGHT CONTROL OPERATIONS BRANCH (FCOB), FCD.						
	2.1.1	FORMAT						
		PERSONS DESIRING TO SUBMIT A PROPOSED CHANGE WILL REDLINE A PAGE FROM THIS DOCUMENT OR REWRITE THE RULE, USING THE STANDARD MISSION RULE FORMAT. ALL PROPOSED CHANGES WILL BE SUPPORTED BY RATIONALE. TWO COPIES WILL THEN BE FORWARDED TO FCOB.						
	2.2	APPROVAL						
	2.2.1	COORDINATION						
		THE ORIGINATOR OF THE CHANGE MAY OBTAIN PRELIMINARY CONCURRENCES. FCOB WILL OBTAIN FORMAL CONCURRENCES FROM THE CHIEF EXPERIMENTS SYSTEMS BRANCH, CHIEF FLIGHT CONTROL DIVISION.						
	2.2.3	DISAPPROVED CHANGES						
		IF A CHANGE IS DISAPPROVED FCOB WILL RETURN THE COPY TO THE ORIGINATOR. A COPY OF THE REQUESTED CHANGE WILL BE RETAINED FOR FUTURE REFERENCE.						
	2.3	PUBLICATION AND DISTRIBUTION OF INTERIM CHANGES						
		INTERIM CHANGES WILL BE DISTRIBUTED VIA AN ABBREVIATED DISTRIBUTION LIST CONSISTING OF THE MISSION CONTROL TEAM, PERTINENT NASA ORGANIZATIONS, AND THE APPROPRIATE CONTRACTOR(S).						
	3.0	REVISIONS						
	3.1	DEVELOPMENT						
		FCOB WILL COMPILE THE EFFECTIVE INTERIM CHANGES AND CORRECTIONS OF MINOR TYPOGRAPHICAL ERRORS INTO COMPLETE PAGE CHANGES TO THE BASIC DOCUMENT. ('PEN AND INK' CHANGES MAY BE USED TO CORRECT TYPOGRAPHICAL ERRORS IF THERE ARE NO OTHER CHANGES ON THE PAGE CONCERNED.)						
	3.2	APPROVAL						
		ALL REVISIONS WILL BE APPROVED BY THE DIRECTOR OF FLIGHT OPERATIONS AND THE MANAGER, APOLLO SPACECRAFT PROGRAM.						
	3.3	PUBLICATION						
	3.3.1	SCHEDULE						
		REVISIONS WILL BE MADE ON AN 'AS REQUIRED' BASIS.						
	3.3.2	DISTRIBUTION						
		REVISIONS WILL BE PRINTED AND DISTRIBUTED ACCORDING TO APPENDIX B.						
		MISSION	REV	DATE	SECTION	GROUP	PAGE	
		ALSEP 3	FNL	3/23/70	APPENDIX C - CHANGE CONTROL		C-1	

**APOLLO**

**FSMR**

**FINAL SYSTEMS  
MISSION RULES**

**APOLLO 13**

**APOLLO  
LUNAR SURFACE  
EXPERIMENTS  
PACKAGE**

**ALSEP 3**

**MARCH 23, 1970**



**FCD  
MSC  
NASA**